

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 13 TOWNSHIP 17 RANGE 3

DATE: 5-05-05

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison fd 6" dn



METHOD OF ESTABLISHMENT: County: 7-16-99

IN. S.P.C. E ZONE NAD '83

NAME: 17031301

N: 519539.1660(m)

E: 59036.5907(m)

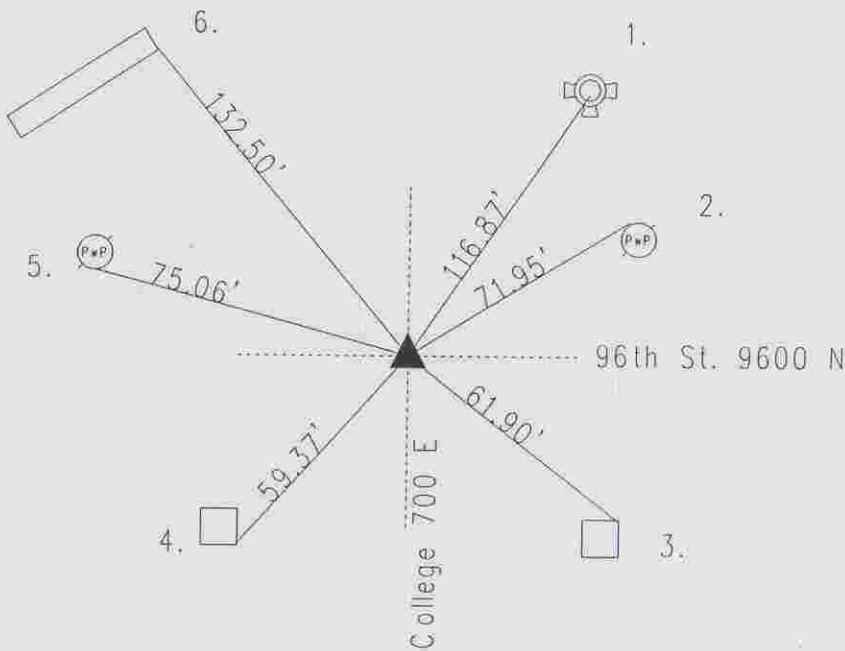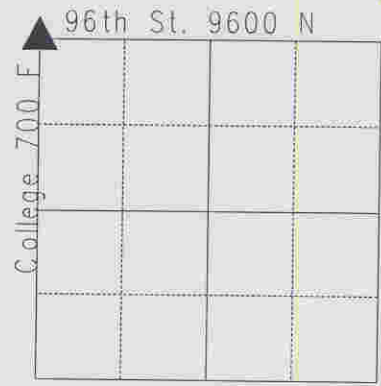

Original post set 1820 by Laughlin with witness: 24" ash N 41 E 14 links; 12" dogwood E 12 S 26 links per Marion County Atlas pg. 8. O.W. Voorhis indicates a stone set with witness: 20" ash N 40 W 62 links, and 18" elm S 51 W 41 1/2 links per Washington Township Legal Survey Book. 2-3-76 Miller called PK nail. 2-25-87 Greene called same. Corner excavated 8-8-89 and set Harrison in position of the PK nail. Re-tied 7-16-99 by Wilcoxon. Re-tied 5-05-05 by Wilcoxon. 17031301

REF.	DISTANCE	DESCRIPTION
1.	116.87'	Top nut of fire hydrant
2.	71.95'	Mag nail w/brass washer NW PwP#11-167A 6" up
3.	61.90'	NF corner concrete base street light
4.	59.37'	SE corner of concrete base street light
5.	75.06'	Mag nail w/brass washer S PwP#10-167A 6" up
6.	132.50'	SF corner of Parkwood Crossing sign